


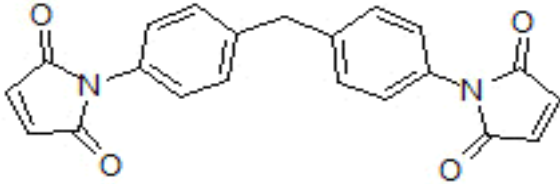


莱州鹏泰贸易有限公司  
Laizhou Pengtai Commerce Ltd.

### TECHINICAL DATA SHEET

<b>Product Name</b>	<b>Bismaleimide (BMI)</b>	
<b>Structure</b>		
<b>CAS No.</b>	<b>13676-54-5</b>	
<b>Molecular Formula</b>	<b>C<sub>21</sub>H<sub>14</sub>N<sub>2</sub>O<sub>4</sub></b>	
<b>Molecular Weight</b>	358.37	
<b>Packing</b>	Plastic Drum	
<b>Quantity</b>	16MT/20'FCL	
<b>Specification</b>	Appearance: Yellowish powder Purity: 98% min Melting point°C: 155-160 Acid Value KOHmg/g (max): 1 Water: 1%max	
<b>Application</b>	Bismaleimide is the monomer to produce Bismaleimide resin. It has the outstanding properties, such as, heat-resisting, anti-oxidize, radiation-resisting. It's mainly used in electrical material, aerospace or acrospace compound material, computeure, communication, car, railway, building and many new material fields.	

Email:info@mgsulfate.com

<http://www.mgsulfate.com>

Designed by [Laizhou Pengtai Commerce Ltd.](#)